




## 205515 - MM Getriebe variabel DR DM 25 1750 mit 2 i.S. FFH 1.251-1.750 silber

### Technische Zeichnung

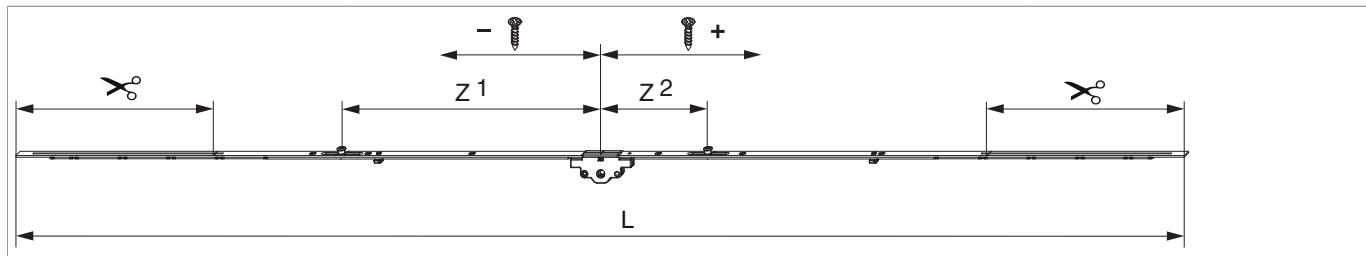

Silber	1750	1.540	25	1.251 - 1.750	260	10	205515
--------	------	-------	----	---------------	-----	----	--------

### Schraubpositionstabelle

No		1	2	3	4	5	6	7	8	
205515	6	-381,5	-308,5	-171,5	74	185	368,5			

### Zapfensitztabelle

No		Z1	Z2	Z3	
205515	2	-343	140		


### Lehren

Bohrlehre für Türgetriebe sperrbar DM 25-50 mm	Profilbreite bis 110 mm	1	No
		1	214634




205515 - MM Getriebe variabel DR DM 25 1750 mit 2 i.S.  
FFH 1.251-1.750 silber


### Abmessungen Getriebekasten

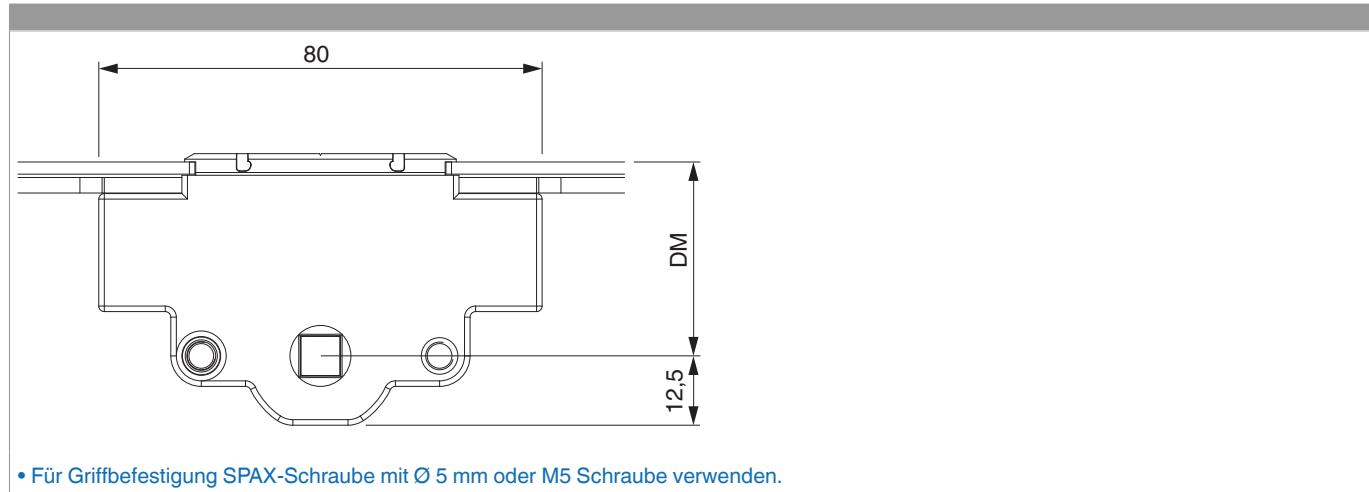

### Bohrbild

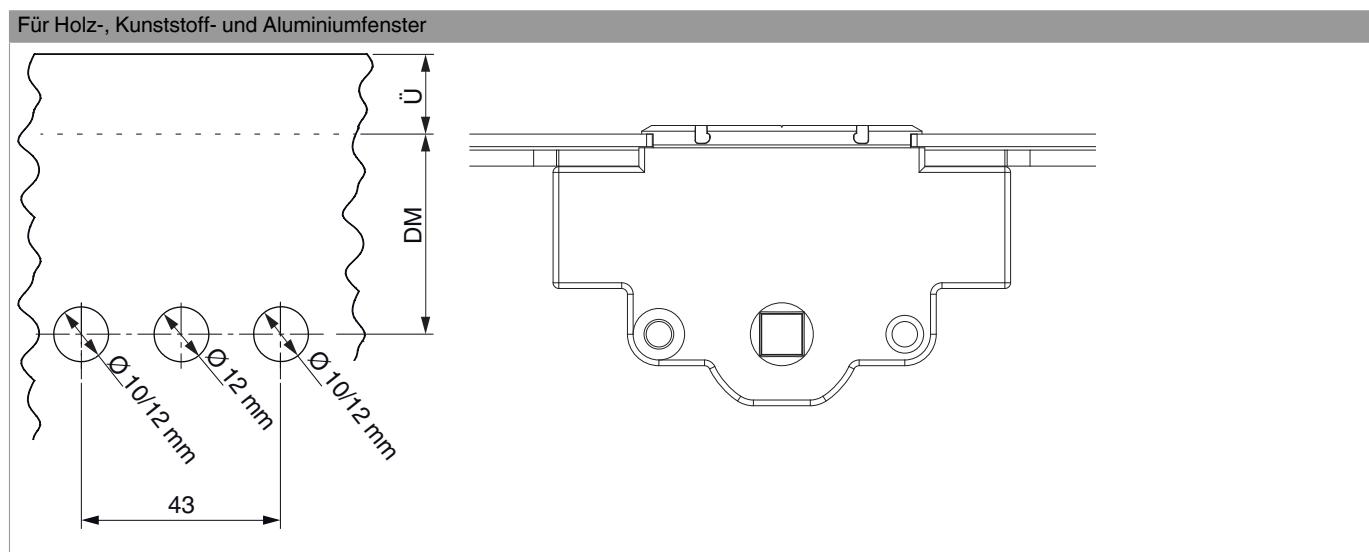


## Stanzbild

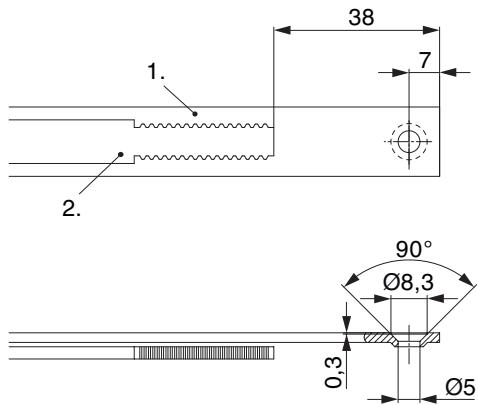

- Wir empfehlen die Schnittkanten von Tricoat-Evo Beschlagteilen mit dem Tricoat-Evo-Ausbesserungslack (Art. Nr. 373439) nachzubehandeln.

1. Stulp  
2. Riegel

## Zahnkastenverbindung

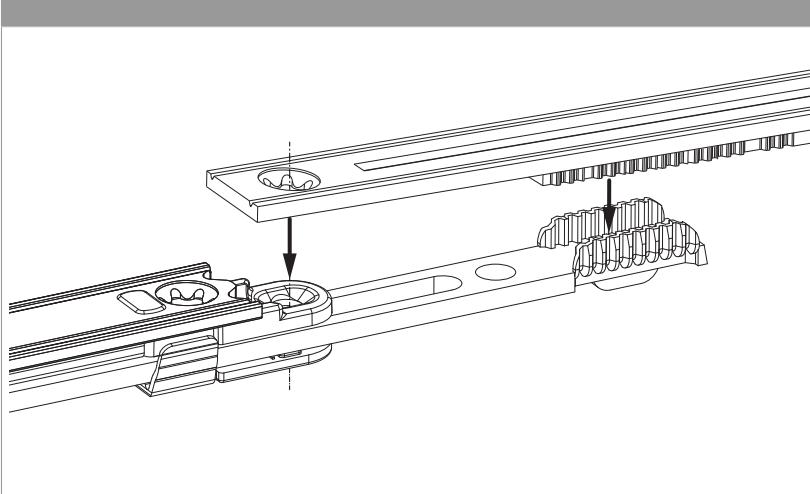

## Anpressdruckeinstellung

i.S Zapfen und Verschlusszapfen

